

PRI 50KH


Optic Rotary Incremental Encoder



- 50 mm case diameter
- Hollow shaft case
- 1024 ppr.
- Push-Pull, TTL, HLD or Linedriver output
- Hollow diameter 15 mm
- 3500 rpm max.



Technical Specifications	
Resolution	1024 ppr.
Output channels	A, B, Z ya da A, $\bar{A}$, B, $\bar{B}$, Z, $\bar{Z}$
Output type	Push-Pull, TTL, HLD or linedriver
Power supply	5V DC, 8-24V DC or 5-24V DC
Power consumption (without load)	< 40 mA (24 VDC)
Cable	2.5m (Standard) 5 Wire + Shield for Push-Pull 2.5m (Standard) 8 Wire + Shield for Linedriver
Max. permissible shaft loading: Radial	100 N
:Axial	60 N
Max. displacement speed	3500 rpm
Rod diameter	Ø15 mm
Rod material	Stainless steel
Case diameter	Ø50 mm
Case material	Aluminium
Protection level	IP 54
Operating temperature	-20°C ... +80°C
Storage temperature	-30°C ... +90°C
Mechanical Specifications	

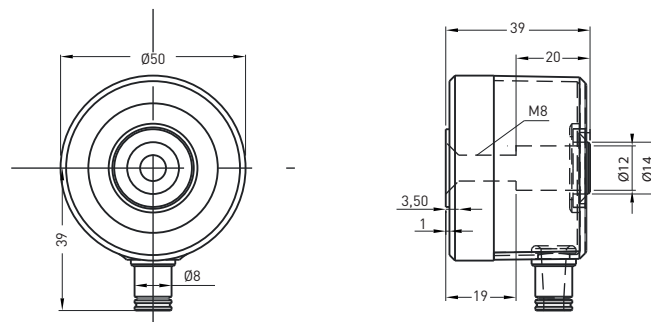

Push-Pull Cable Output

+V : Brown
 0V : White
 GND : Shield
 Ch A : Yellow
 Ch B : Green
 Ch Z : Gray

TTL - HLD Cable Output

+V : Brown
 0V : White
 GND : Shield
 Ch A : Yellow
 Ch B : Green
 Ch Z : Gray
 Ch A inv : Blue
 Ch B inv : Red
 Ch Z inv : Pink

Ordering Procedure

Model	Case diameter	Case type	Hollow diameter	Output type	Resolution	Output channels	Power supply	Connector / Cable	Cable output
PRI	50 mm	KH	8	HLD	1024	Z	V2	2M5	R
PRI	50 mm	KH : Yarı delik	6 : 6mm 8 : 8mm 10 : 10mm 12 : 12mm 14 : 14mm 15 : 15mm	LTP : Push-Pull LD : TTL Linedriver HLD : High Linedriver	1024 ppr.	Z : A, B, Z B : A, B ZZ : AA, BB, ZZ	V1 : 5V DC V2 : 8 - 24V DC V3 : 5 - 24V DC	2M5: 2,5 meter cable 5M : 5 meter cable 8M : 8 metre cable 10M: 10 metre cable	R : Radial

Please note: The specifications and information in this datasheet may not cover all special demands arising from specific applications. Therefore, they do not constitute a comprehensive description of the product properties. OPKON accepts no responsibility for damages resulting from the improper application of our products. The user is responsible for ensuring that the products used are suitable for their own application.